

PLATINUM COLLECTION




Measuring Guide:

PLATINUM STORM & SECURITY DOORS


The Platinum Collection features our easiest storm door installation system. Use the diagram on the right to record your measurements as shown. If the width measurements vary, record the smallest measurement.

SURFACE MOUNT

The rails mount directly to the face of the exterior door trim and require 3/4" of clearance on each side and up to 1" of clearance above the opening.

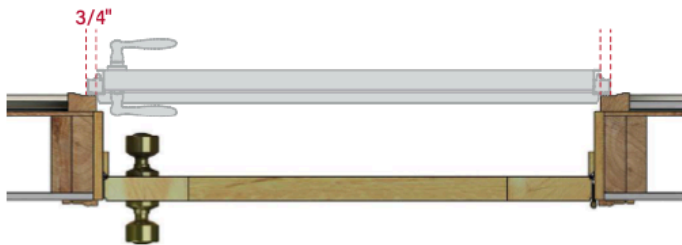


Construction styles may vary.



PRE-HINGED FOR EFFORTLESS INSTALLATION

Select **L** (left-hinge) or **R** (right-hinge) as viewed from outside when ordering.

 Look for this icon.

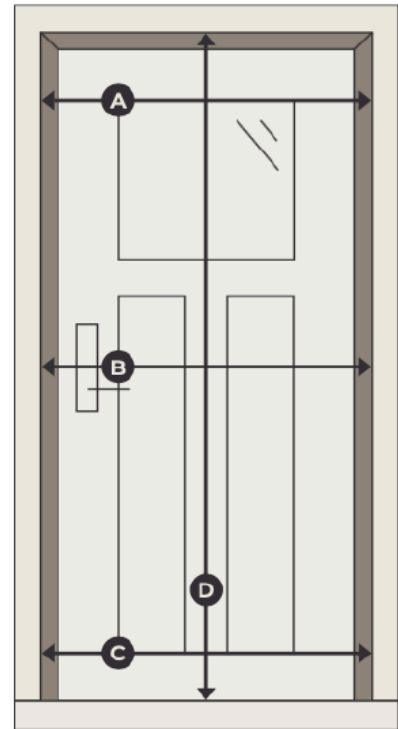

RECORD MEASUREMENTS

A	Width	C	Width
B	Width	D	Height

SPECIFY WHEN ORDERING:

- A.** Model Number
- B.** Color
- C.** Required Opening Size (Width x Height)
- D.** Platinum Hinge Side (LH or RH)

DOOR OPENING	MIN. WIDTH	MAX. WIDTH	MIN. HEIGHT	MAX. HEIGHT
32" x 81"	31-7/8"	32-3/8"	80"	81"
36" x 81"	35-7/8"	36-3/8"		